

PA 2-160 Stereo Power Amplifier

The Sherbourn PA 2-160 Stereo Power Amplifier combines outstanding design, careful attention to detail, and quality parts to deliver audiophile sound and industrial reliability in an economical package. The PA 2-160 features a fully symmetrical design using all discrete components, a massive toroidal power transformer, and convection cooling to provide 160 watts-per-channel @ 8 Ohms without the need for forced air cooling.



Features

- 2 x 160 watts @ 8 Ohms; 2 x 225 watts @ 4 Ohms Class A/B
- True audiophile sound quality
- Fully symmetrical discrete power amp design
- Massive toroidal power supply
- Adjustable input level trim
- Trigger inputs / outputs
- Convection cooled (no fans)
- Rack mountable
- 5-year warranty

Specifications

160 watts RMS per channel @ 8 Ohms 20 Hz - 20 kHz at < 0.05% THD Class A/B

225 watts RMS per channel @ 4 Ohms 20 Hz - 20 kHz at < 0.05% THD

all-channels-driven

Power bandwidth: 5 Hz - 75 kHz

Gain: 30 dB

S/N ratio: 110 dB A weighted

Input impedance: 40 kOhms

Sensitivity for full output: 1.1 V

Dynamic headroom: 1.3 dB

Power supply: 120 V / 60 Hz or 230 V / 50 Hz (user selectable)


Dimensions: 17" W x 17.5" D x 4" H

Carton weight: 39 lbs

PA 2-160 Back Panel



Front View

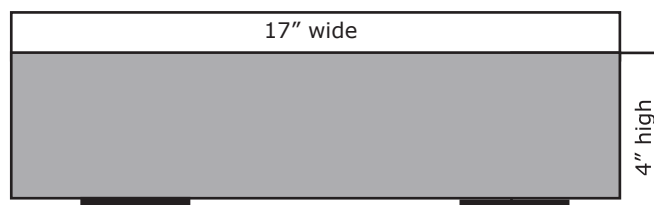

Side View

