

## Advanced Information

---

- XQ60b Powered Subwoofer
- A Powerful Performance Subwoofer
- Deep Tuneful Bass
- 200W Class-D power Amplifier
- Die-cast 300mm (12in.) Down Firing Bass Driver
- Sealed Box for Tight Controlled Bass
- Frequency Response 26Hz-140Hz
- 111dB Maximum SPL
- Perfect integration with any Loudspeaker
- 2 Position Phase Switch
- 3 Position Bass eq. selector
- Adjustable Gain
- Low Pass Crossover Adjustable from 40Hz to 140Hz
- Newly Improved 24 db per Octave 4th Order Filter




Powerful Elegance. The attractive curved cabinet and hand finished rich gloss black lacquer finish of the XQ60b is an elegant covering that beautifully wraps a subwoofer that is all about performance. The combination of a massive 300mm die-cast long-throw LF driver driven by a powerful 200W RMS Class-D amplifier delivers high output and deep, tight, tuneful bass that is as sure to cleanly reproduce the thunderous effects of the latest James Bond movie, as it is to provide the subtle LF support and detail of a Mahler symphony.

What's more, the simple and logical controls and connections of the XQ60b are sure to guarantee these results in your system at home. With both line level and speaker level inputs that can function simultaneously,

the XQ60b is easy to integrate into any system configuration. The adjustable selectable phase control, low pass crossover and 3 levels of adjustable equalization let you tailor the performance of the XQ60b to match your main speakers and to compensate for the variability of room placement. The XQ60b also debuts the KEF SmartConnect™ Intelligent LFE and Stereo Line Level inputs. SmartConnect™ automatically detects whether an LFE or stereo input is connected and then adjusts the subwoofer's volume level (gain) accordingly, greatly simplifying the set up process. So no matter what your system or room, or taste in movies and music, the XQ60b will deliver ground shaking low frequency support that will make your listening experience perfect.

CONNECT A STEREO SIGNAL

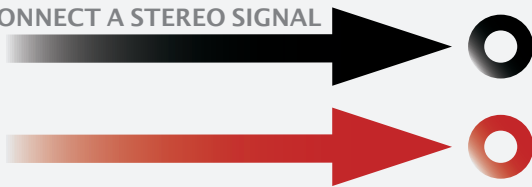


L&R Stereo

OR CONNECT A LFE / MONO SIGNAL HERE



MONO/LFE

OR HERE



smartCONNECT

Connect the LFE/Mono to either input and SmartConnect™ detects the connection and adjusts the subwoofers's gain to deliver the same output from a single input.

## Specification

Model	XQ60b
Type	Powered Subwoofer
LF drive unit	1 x 300mm (12in.)
Frequency range	26Hz - 140Hz
Amplifier	200 Watts built-in Class-D
Maximum output (SPL)	111dB
Low pass filter	Variable 40Hz - 140Hz, 4th-order
Low level signal inputs	RCA phono sockets
Enclosure type	Sealed
Internal volume	49 litres
Net weight	21.4kg (47.2lbs)
Dimensions (H x W x D)	444 x 587 x 415 mm
	17.5 x 23.1 x 16.3 in.
Power requirements	100 - 240V ac ~ 50 / 60Hz
Power consumption	200VA

[www.kef.com](http://www.kef.com)

GP Acoustics reserve the right, in line with continuous research and development, to amend or change specifications without prior notice. E. & O.E.

GP Acoustics (UK) Ltd., Eccleston Road, Tovil, Maidstone, Kent, ME15 6QP U.K. Tel: +44 (0)1622 672261 Fax: +44 (0)1622 750653

GP Acoustics (US) Inc., 10 Timber Lane, Marlboro, New Jersey 07746 U.S.A. Tel: +(1) 732 683 2356 Fax: +(1) 732 683 2358

GP Acoustics GmbH, Am Brambusch 22, 44536 Lünen, Deutschland. Tel: +49 (0) 231 9860-320. Fax: +49 (0) 231 9860-330

GP Acoustics (France) SAS, 39 Rue des Granges Galand - BP60414, 37554 Saint Avertin CEDEX, France. Tel: +33(0)2 47 80 49 01 Fax: +33(0)2 47 27 89 64

GP Acoustics (HK) Limited, 6F, Gold Peak Building, 30 Kwai Wing Road, Kwai Chung, N.T., Hong Kong. Tel: +(852) 2410 8188 Fax: +(852) 2401 0754

**KEF**  
INNOVATORS IN SOUND