



IN ADMIRATION OF MUSIC

DALI EPICON SERIES

DALI EPICON ESCAPE TO REALITY

SEDUCTION OF THE SENSES



DALI EPICON 6

Allow sensational musical moments to live on in the comfort of your own home with the revolutionary EPICON 6. Designed to make a lasting impression, the exterior of the loudspeaker is as captivating to the eye as the sound is to the ear.


The backbone of the EPICON Series is DALI's new unrivalled driver technology. The EPICON 6 features two 6½" woofers, the unique Linear Drive Magnet System and the revolutionary ribbon/soft dome hybrid tweeter, which combine to allow EPICON's sound to break with traditional loudspeaker conventions. Sit back and enjoy impeccable high frequencies and voice reproductions so lifelike, you will feel as if you are in the middle of a live performance.



TECHNICAL INFORMATION

Visit our dedicated EPICON micro site for more in-depth information about the EPICON series.

www.dali-epicon.com

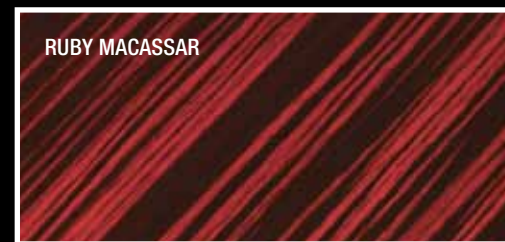

DALI EPICON 8



Frequency Range [+/- 3] dB [Hz]	35-30,000
Sensitivity [2.83V/1m] [dB]	89.0
Nominal Impedance [ohms]	5
Maximum SPL [dB]	112
Recommended Amp. Power [Watts]	50-500
Crossover Frequencies [Hz]	550/3.100/15,000
Crossover Principle	3+½-way
High Frequency Driver	1 x 29 mm soft dome 1 x 10 x 55 mm ribbon
Low Frequency/Midrange Driver(s)	2 x 8" / 1 x 6½"
Enclosure Type	Bass reflex
Bass Reflex Tuning Frequency [Hz]	28.0
Connection Input(s)	Bi-wire / Bi-Amp
Recommended Placement	Floor
Recommended Distance from rear wall to speaker's rear side [cm]	>35
Magnetic Shielding	No
Dimensions (H x W x D) [mm]	1225 x 264 x 485
Dimensions (H x W x D) [inches]	48.23 x 10.39 x 19.09
Dimensions with base (H x W x D) [mm]	1262 x 353 x 497
Dimensions with base (H x W x D) [inches]	49.69 x 13.90 x 19.57
Weight [kg/lb]	47.5/104.7
Accessories	DALI Spike Set, DALI Terminal Link Set, Base plate, Polishing cloth, Rubber feet, Manual

DALI EPICON 6

Frequency Range [+/- 3] dB [Hz]	35-30,000
Sensitivity [2.83V/1m] [dB]	88.0
Nominal Impedance [ohms]	5
Maximum SPL [dB]	110
Recommended Amp. Power [Watts]	50 - 300
Crossover Frequencies [Hz]	700/2.550/15,000
Crossover Principle	2½+½-way
High Frequency Driver	1 x 29 mm soft dome 1 x 10 x 55 mm ribbon
Low Frequency/Midrange Driver(s)	2 x 6½"
Enclosure Type	Bass reflex
Bass Reflex Tuning Frequency [Hz]	32.5
Connection Input(s)	Bi-wire / Bi-Amp
Recommended Placement	Floor
Recommended Distance from rear wall to speaker's rear side [cm]	>25
Magnetic Shielding	No
Dimensions (H x W x D) [mm]	1025 x 232 x 441
Dimensions (H x W x D) [inches]	40.36 x 9.13 x 17.36
Dimensions with base (H x W x D) [mm]	1062 x 320 x 459
Dimensions with base (H x W x D) [inches]	41.73 x 12.60 x 18.07
Weight [kg/lb]	30/66.1
Accessories	DALI Spike Set, DALI Terminal Link Set, Base plate, Polishing cloth, Rubber feet, Manual

DALI EPICON 2

Frequency Range [+/- 3] dB [Hz]	47-30,000
Sensitivity [2.83V/1m] [dB]	87.0
Nominal Impedance [ohms]	4
Maximum SPL [dB]	108
Recommended Amp. Power [Watts]	30-200
Crossover Frequencies [Hz]	3.100
Crossover Principle	2-way
High Frequency Driver	1 x 29 mm soft dome
Low Frequency/Midrange Driver(s)	1 x 6½"
Enclosure Type	Bass reflex
Bass Reflex Tuning Frequency [Hz]	43.0
Connection Input(s)	Bi-wire / Bi-Amp
Recommended Placement	Stand
Recommended Distance from rear wall to speaker's rear side [cm]	>25
Magnetic Shielding	No
Dimensions (H x W x D) [mm]	386 x 214 x 366
Dimensions (H x W x D) [inches]	15.20 x 8.43 x 14.41
Dimensions with base (H x W x D) [mm]	-
Dimensions with base (H x W x D) [inches]	-
Weight [kg/lb]	10.3/22.7
Accessories	DALI Terminal Link Set, Polishing cloth, Rubber feet, Manual

DALI EPICON VOKAL

Frequency Range [+/- 3 dB] [Hz]	49-30,000
Sensitivity [2.83 V/1m] [dB]	89.5
Nominal Impedance [Ω]	6
Maximum SPL [dB]	111
Recommended Amp. Power [Watt]	50 - 300
Crossover Frequencies [Hz]	2,750/15,000
Crossover Principle	2+½-way
High Frequency Drivers [mm]	1 x 29 mm soft dome 1 x 10 x 55 ribbon
Low Frequency Drivers [inches]	2 x 6½"
Enclosure Type	Bass Reflex
Bass Reflex Tuning Frequency [Hz]	46,5
Terminals	Bi-wire / Bi-Amp
Recommended Placement	Below TV screen/on stand
Recommended distance from rear wall to speaker's rear side (cm)	>5
Magnetic Shielding	No
Dimensions [HxWxD] [mm]	247 x 816 x 349
Dimensions [HxWxD] [inches]	9.65 x 32.13 x 13.74
Weight [kg/lb]	18.4/40.6
Accessories included	DALI Terminal Link Set, Polishing cloth, Damper feet, Manual

DALI SUB P-10 DSS

Frequency Range [+/- 3 dB] [Hz]	24-250
Crossover Frequencies [Hz]	40-120
Sensitivity [2.83 V/1m] [mV]	Cinema mode: 76 Hifi mode: 91
Connection Inputs	RCA, Stereo (low-pass filtered) LFE (Mono)
Maximum SPL [dB]	112
Max. Amplifier Power Output [RMS Watts]	500
Continuous IEC Power Output [RMS Watts]	300
Max Power Consumption [Watts]	550
Low Frequency Drivers [inches]	1 x 10" long stroke active, 2 x 10" long stroke passive
Enclosure Type	Closed box with dual passive radiators
Recommended Placement	Floor, near wall or corner
Recommended distance from rear wall to speaker's rear side (cm)	>5
Magnetic Shielding	No
Dimensions [HxWxD] [mm]	370 x 340 x 340
Dimensions [HxWxD] [inches]	14.6 x 13.4 x 13.4
Weight [kg/lb]	19.5/43.0
Accessories included	Spike set, Manual, Remote Control

DALI EPICON STAND

Dimensions (without spikes) [HxWxD] [mm]	531 x 275 x 401
Dimensions (without spikes) [HxWxD] [inches]	20.91 x 10.83 x 15.79
Weight (kg/lb)	10.4/22.9
Accessories	DALI Spike Set, Manual, 3 x M6 Screw



All technical specifications are subject to change without notice.



IN ADMIRATION OF MUSIC

DALI A/S | Dali Allé 1 | DK-9610 Noerager | Denmark | Tel: +45 96 72 11 55 | Fax: +45 98 55 19 40

www.dali-speakers.com | www.dali-epicon.com