




IN ADMIRATION OF MUSIC

DALI EPICON SERIES

DALI EPICON ESCAPE TO REALITY

ESCAPISM FOR THE MIND

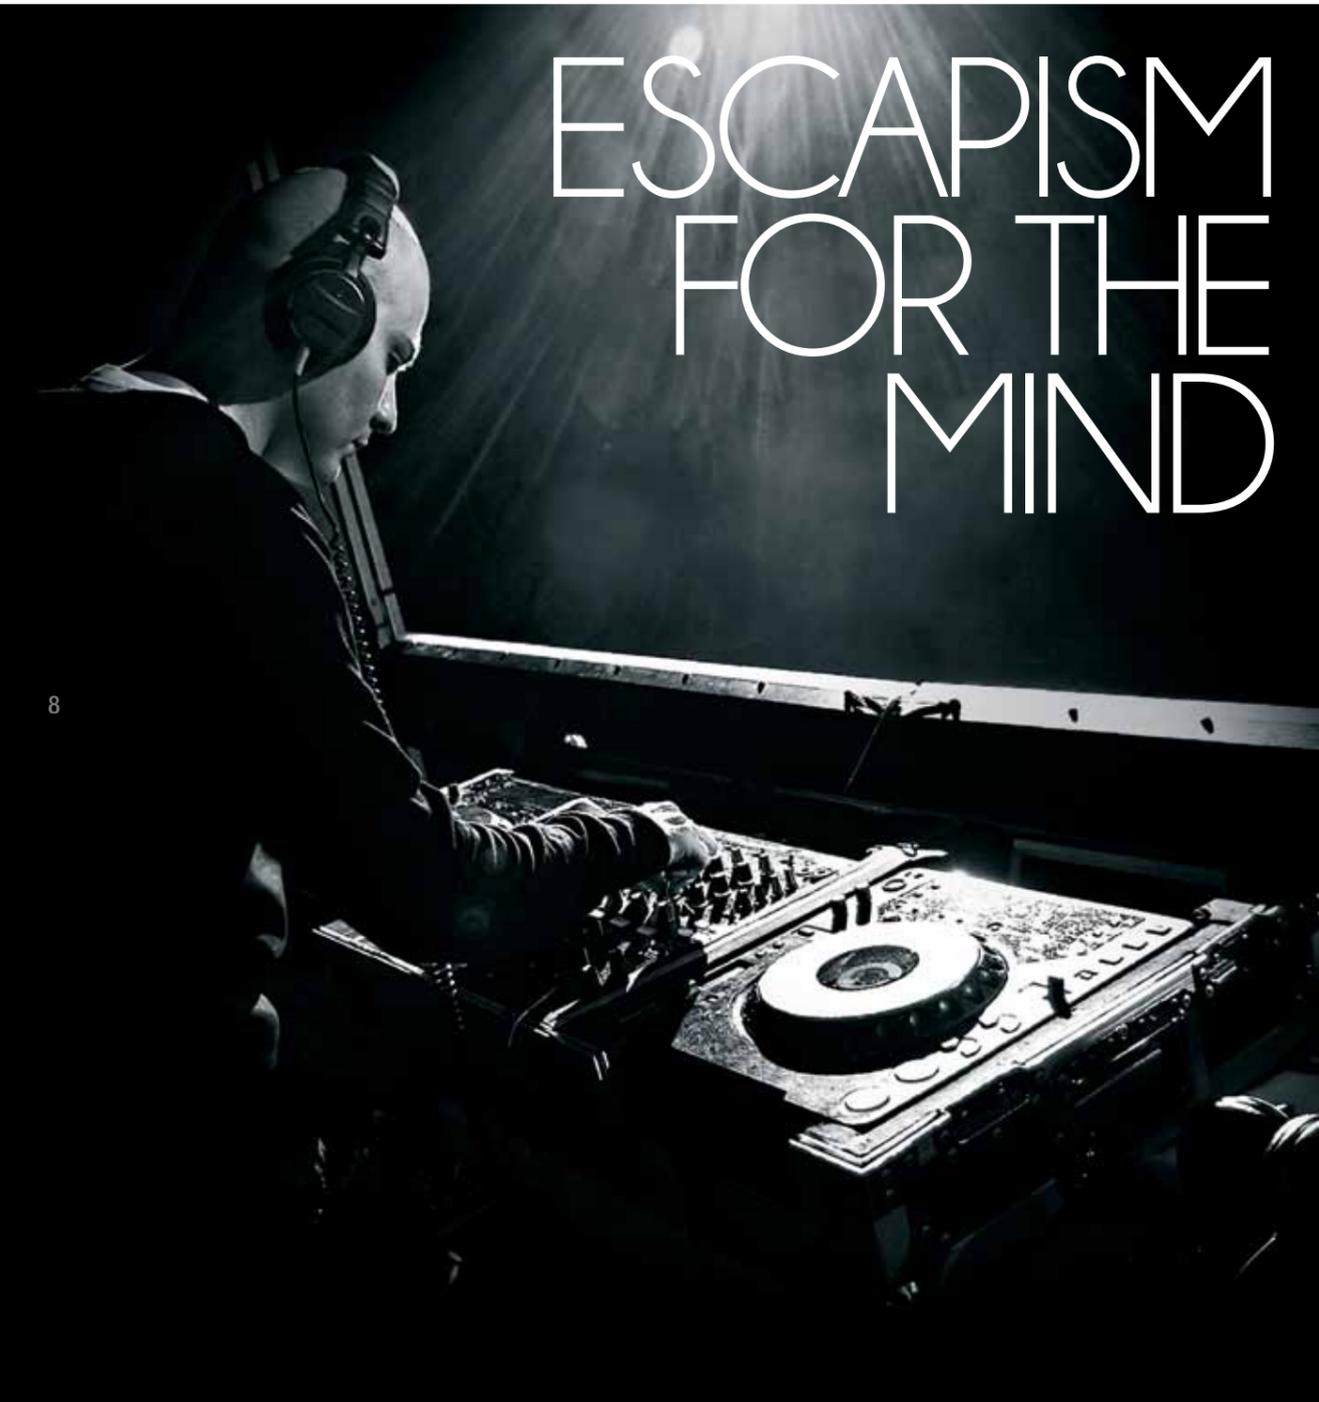

DALI EPICON 2

If you dream of fantastic sound experiences the EPICON 2 is the perfect escape. Don't be fooled by the size of the speaker – the most diminutive in the EPICON family. Sitting gracefully upon its custom-made stand EPICON 2 produces an astonishingly large and accurate three-dimensional sound that will impress even the most rigorous demands of true audiophiles.

The two-way design features a 6½" bass driver and a soft dome exclusively used in the EPICON 2. In fact, the technological breakthroughs designed for the larger EPICON 6 and 8 models have been channelled into EPICON 2 to create a speaker that performs way beyond its size expectations.





SOUND
 DESIGNED
 TO MOVE
 YOU

TECHNICAL INFORMATION

Visit our dedicated EPICON micro site for more in-depth information about the EPICON series.

www.dali-epicon.com



DALI EPICON 8



Frequency Range [+/- 3] dB [Hz]	35-30,000
Sensitivity [2.83V/1m] [dB]	89.0
Nominal Impedance [ohms]	5
Maximum SPL [dB]	112
Recommended Amp. Power [Watts]	50-500
Crossover Frequencies [Hz]	550/3.100/15,000
Crossover Principle	3+½-way
High Frequency Driver	1 x 29 mm soft dome 1 x 10 x 55 mm ribbon
Low Frequency/Midrange Driver(s)	2 x 8" / 1 x 6½"
Enclosure Type	Bass reflex
Bass Reflex Tuning Frequency [Hz]	28.0
Connection Input(s)	Bi-wire / Bi-Amp
Recommended Placement	Floor
Recommended Distance from rear wall to speaker's rear side [cm]	>35
Magnetic Shielding	No
Dimensions (H x W x D) [mm]	1225 x 264 x 485
Dimensions (H x W x D) [inches]	48.23 x 10.39 x 19.09
Dimensions with base (H x W x D) [mm]	1262 x 353 x 497
Dimensions with base (H x W x D) [inches]	49.69 x 13.90 x 19.57
Weight [kg/lb]	47.5/104.7
Accessories	DALI Spike Set, DALI Terminal Link Set, Base plate, Polishing cloth, Rubber feet, Manual

DALI EPICON 6

Frequency Range [+/- 3] dB [Hz]	35-30,000
Sensitivity [2.83V/1m] [dB]	88.0
Nominal Impedance [ohms]	5
Maximum SPL [dB]	110
Recommended Amp. Power [Watts]	50 - 300
Crossover Frequencies [Hz]	700/2.550/15,000
Crossover Principle	2½+½-way
High Frequency Driver	1 x 29 mm soft dome 1 x 10 x 55 mm ribbon
Low Frequency/Midrange Driver(s)	2 x 6½"
Enclosure Type	Bass reflex
Bass Reflex Tuning Frequency [Hz]	32.5
Connection Input(s)	Bi-wire / Bi-Amp
Recommended Placement	Floor
Recommended Distance from rear wall to speaker's rear side [cm]	>25
Magnetic Shielding	No
Dimensions (H x W x D) [mm]	1025 x 232 x 441
Dimensions (H x W x D) [inches]	40.36 x 9.13 x 17.36
Dimensions with base (H x W x D) [mm]	1062 x 320 x 459
Dimensions with base (H x W x D) [inches]	41.73 x 12.60 x 18.07
Weight [kg/lb]	30/66.1
Accessories	DALI Spike Set, DALI Terminal Link Set, Base plate, Polishing cloth, Rubber feet, Manual

DALI EPICON 2

Frequency Range [+/- 3] dB [Hz]	47-30,000
Sensitivity [2.83V/1m] [dB]	87.0
Nominal Impedance [ohms]	4
Maximum SPL [dB]	108
Recommended Amp. Power [Watts]	30-200
Crossover Frequencies [Hz]	3.100
Crossover Principle	2-way
High Frequency Driver	1 x 29 mm soft dome
Low Frequency/Midrange Driver(s)	1 x 6½"
Enclosure Type	Bass reflex
Bass Reflex Tuning Frequency [Hz]	43.0
Connection Input(s)	Bi-wire / Bi-Amp
Recommended Placement	Stand
Recommended Distance from rear wall to speaker's rear side [cm]	>25
Magnetic Shielding	No
Dimensions (H x W x D) [mm]	386 x 214 x 366
Dimensions (H x W x D) [inches]	15.20 x 8.43 x 14.41
Dimensions with base (H x W x D) [mm]	-
Dimensions with base (H x W x D) [inches]	-
Weight [kg/lb]	10.3/22.7
Accessories	DALI Terminal Link Set, Polishing cloth, Rubber feet, Manual

DALI EPICON VOKAL

Frequency Range [+/- 3 dB] [Hz]	49-30,000
Sensitivity [2.83 V/1m] [dB]	89.5
Nominal Impedance [Ω]	6
Maximum SPL [dB]	111
Recommended Amp. Power [Watt]	50 - 300
Crossover Frequencies [Hz]	2,750/15,000
Crossover Principle	2+½-way
High Frequency Drivers [mm]	1 x 29 mm soft dome 1 x 10 x 55 ribbon
Low Frequency Drivers [inches]	2 x 6½"
Enclosure Type	Bass Reflex
Bass Reflex Tuning Frequency [Hz]	46,5
Terminals	Bi-wire / Bi-Amp
Recommended Placement	Below TV screen/on stand
Recommended distance from rear wall to speaker's rear side (cm)	>5
Magnetic Shielding	No
Dimensions [HxWxD] [mm]	247 x 816 x 349
Dimensions [HxWxD] [inches]	9.65 x 32.13 x 13.74
Weight [kg/lb]	18.4/40.6
Accessories included	DALI Terminal Link Set, Polishing cloth, Damper feet, Manual

DALI SUB P-10 DSS

Frequency Range [+/- 3 dB] [Hz]	24-250
Crossover Frequencies [Hz]	40-120
Sensitivity [2.83 V/1m] [mV]	Cinema mode: 76 Hifi mode: 91
Connection Inputs	RCA, Stereo (low-pass filtered) LFE (Mono)
Maximum SPL [dB]	112
Max. Amplifier Power Output [RMS Watts]	500
Continuous IEC Power Output [RMS Watts]	300
Max Power Consumption [Watts]	550
Low Frequency Drivers [inches]	1 x 10" long stroke active, 2 x 10" long stroke passive
Enclosure Type	Closed box with dual passive radiators
Recommended Placement	Floor, near wall or corner
Recommended distance from rear wall to speaker's rear side (cm)	>5
Magnetic Shielding	No
Dimensions [HxWxD] [mm]	370 x 340 x 340
Dimensions [HxWxD] [inches]	14.6 x 13.4 x 13.4
Weight [kg/lb]	19.5/43.0
Accessories included	Spike set, Manual, Remote Control

DALI EPICON STAND

Dimensions (without spikes) [HxWxD] [mm]	531 x 275 x 401
Dimensions (without spikes) [HxWxD] [inches]	20.91 x 10.83 x 15.79
Weight (kg/lb)	10.4/22.9
Accessories	DALI Spike Set, Manual, 3 x M6 Screw



All technical specifications are subject to change without notice.



IN ADMIRATION OF MUSIC

DALI A/S | Dali Allé 1 | DK-9610 Noerager | Denmark | Tel: +45 96 72 11 55 | Fax: +45 98 55 19 40

www.dali-speakers.com | www.dali-epicon.com